



# SOMMERS

## SMG DV 230

MODEL:SMG DV230

Power rating @ 60Hz		Power rating @ 50Hz	
<b>Prime</b>	209 KW	<b>Prime</b>	200 KW
<b>Standby</b>	231 KW	<b>Standby</b>	220 KW

Generator set comprising engine and alternator assembly mounted on fabricated steel profile baseframe. Baseframe is painted with a phosphate primer and top coat.

The alternator is directly coupled to the engine and the rotor is fixed to the flywheel using steel discs for flexibility. This assembly guarantees perfect alignment and the absence of vibration.

The engine is fixed to the baseframe using anti-vibration pads.

### ENGINE: VOLVO PENTA (Four- stroke diesel engine with direct injection)

Model	TAD 940 GE	Aspiration	Turbo Charged
No. of cylinders	6	Cooling	Water cooled
Engine capacity	9360c.c	Speed 60 / 50Hz	1800/1500rpm
Bore	120mm		
Stroke	138mm		
Compression Ratio	20.2:1		

**Fuel tank capacity 418 Litres**

	Fuel consumption @ 60HZ			Fuel consumption @ 50HZ		
	I/h	Run Time		I/h	Run Time	
25% load	16.4		25.48	14.9		28.05
50% load	29.4		14.21	26.6		15.71
75% load	42.2		9.90	38.7		10.80
100% load	57.4		7.28	53.4		7.82

### Cooling System

Closed circuit water cooled with expansion tank included in the radiator. Tropical radiator and fan with guard. Suitable for working at ambient temperatures of up to 53°C.

Air flow fan 60 / 50 Hz 247m<sup>3</sup>min,

### Lubrication system

Forced lubrication with gear type pump. Oil filter.

Oil sump capacity	35 L
Oil consumption	0.15 Fuel Consumption (%)

# SMG DV 230

## Air intake system

Turbo charged with dry air filter.

Combustion air flow 18.1m<sup>3</sup>min

## Injection system

In-Line injection pump with GAC electronic governor. Fuel filter and pre-filter

## Electrical system

24 V starting system. Axial starter motor. 2 x 12V 120 Ah batteries 60 Amp Battery charging alternator. Oil pressure and engine temperature sensors.

## Protection System

Automatic engine shutdown for low oil pressure, low fuel level, high engine temperature, battery charge failure.

## Exhaust System

Consists of industrial exhaust silencer with 10dB(A) noise reduction, flexible hose and brackets. Optionally, a residential silencer can be supplied.

## Alternator


Stamford / Newage Brushless Alternator. Self regulated via AVR keeping voltage within 1.5%. Windings are Class H insulated, All wound components are impregnated with polyester resin for resistance to acids and oils. Protection grade IP 22.

## ELECTRICAL SYSTEM


### Control Panel Deep Sea 5310 RS485

3pos. Switch (Auto/Off/Manual)	□	Three-phase terminals	■
Ammeter	3	Engine temperature gauge	□
Frequency meter	1	Fuel level gauge	□
Voltmeter	1	Battery charge meter	□
Battery voltmeter	■	Oil pressure gauge	□
Mains-generator switch	■	ON lamp	□
3-phase monitoring card	■	Heater lamp	■
Hours run meter	■	Emergency stop button	■

## Dimensions

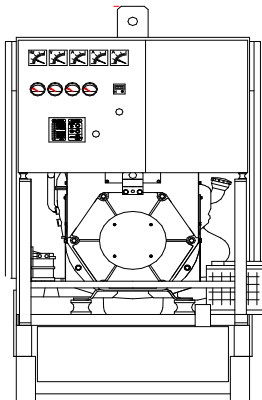

Length (L) 114.17"  
Width (W) 43.30"

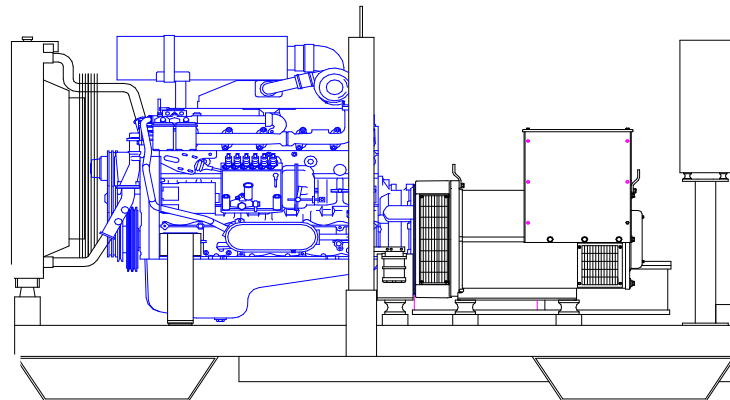

Height (H) 80.98"  
Weight 5909.4Lb's

NOTE: Not for  
Construction use  
Consult factory.